


Leading the Industry in **Solar Microinverter Technology**



The APsystems Microinverter Solution

The APsystems Solution integrates grid-tied microinverters with intelligent networking and monitoring systems to ensure maximum efficiency of your solar array and optimize solar harvest.

Our system combines APsystems Microinverters with our state-of-the-art communications unit, the APsystems Communicator (ECU), and advanced monitoring software, the APsystems Monitor (EMA), to bring you the most powerful, economical, reliable, intelligent and safe solar solution on the market today.

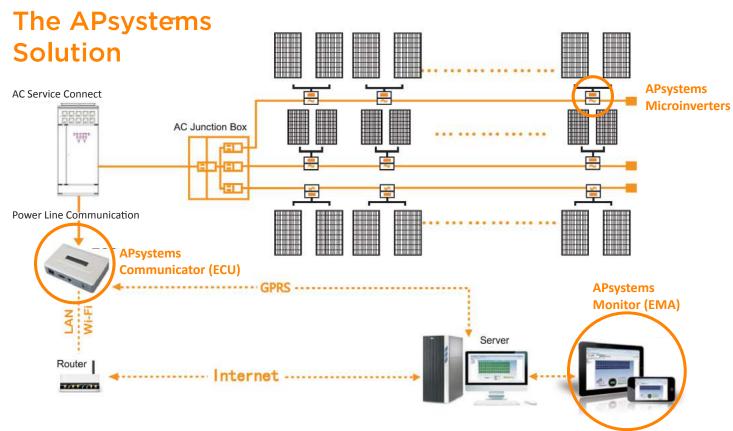

APsystems Communicator (ECU)

The APsystems Communicator, our state-of-the-art Energy Communication Unit (ECU), is the information gateway for our APsystems microinverters. It collects and transfers module performance data in real time, giving you comprehensive monitoring and control over each individual module, optimizing the performance of your solar array.



APsystems Monitor (EMA)

The APsystems Monitor, our robust wireless Energy Monitoring & Analysis (EMA), gives you around-the-clock monitoring of your solar installation through any webenabled device, anywhere, anytime. This advanced web-based software detects and alerts the user to any performance issues, ensuring the most efficient output of your solar PV array.



APsystems ECU-3 Datasheet

COMMUNICATION INTERFACE

Powerline / ZigBee APsystems Propietary
Ethernet 10/100M

USB Interface Standard

RS232 serial port (GPRS modem) Optional

POWER REQUIREMENTS

AC outlet 110-240 VAC, 50-60 Hz
Power consumption 2.5W

MECHANICAL DATA

Dimension (WxHxD)

7.1" x 4.4" x 1.6"

Weight

O.83lbs (380g)

Ambient temperature

Enclosure environmental rating

Indoor-NEMA 1 (IP30)

FEATURES

Standard warranty term 3 years
Standard IEC 60950 GB/T17799

7.6.15 © All Rights Reserved

